

Assembly Instruction Sheet #IS-5549W10C For Style 5549W10C

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (2) E12 Candelabra Base Bulbs 60W Maximum(Watt Includ).

Estimated Assembly Time: 15-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

- Fixture Body x1
- Crystal x3
- Crystal x3

PART #	DESCRIPTION	QUANTITY
AA	Decorative Caps	2ea
BB	Backplate	1ea
CC	Outlet Box	1ea
DD	Mounting Screw	2ea
EE	Mounting Bracket	1ea

STEP 1 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting Bracket.

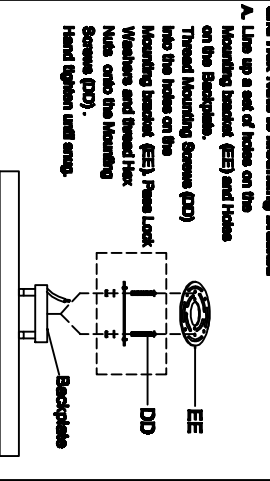


Figure 1

STEP 2 - Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws. Tighten until snug.




Figure 2

STEP 3 - Fit Backplates to Mounting bracket Assembly

A. Fit the Backplate to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The backplate should be snug against the ceiling and the Decorative Caps (AA) if not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the backplate is secure, remove the Decorative Caps (AA) and backplate and proceed to step 4




Figure 3

STEP 4 - Wire Connections

A. Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

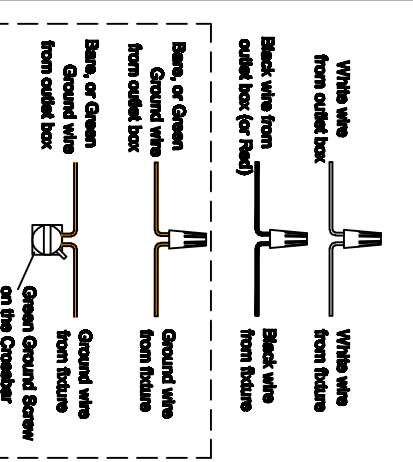


Figure 4

STEP 5 - Install Backplates to Ceiling

A. Carefully tuck all wires into the outlet box and position the backplate of the Fixture Body (A) over the outlet box. Align the holes. Secure with Decorative Caps (AA) and hand tighten until snug.


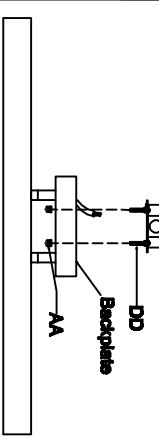


Figure 5

STEP 6 - Install Crystal and Bulb.

A. Install bulbs into sockets and screw snug into place.
B. Please put the crystal to the Fixture Body (A).

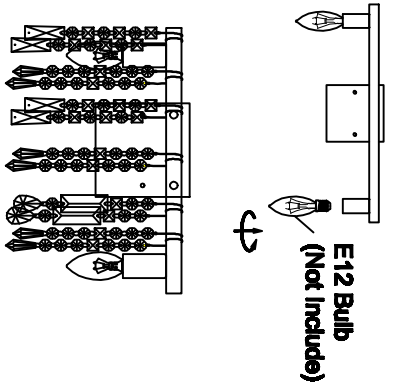

- Crystal x3
- Crystal x3

Figure 6