



Features

- Made of lightweight double anodized aluminum
- Frosted lens protects light source while evenly diffusing light
- Field cuttable extrusion, grip strips and lens
- Grip Strip Installation Tool recommended
- Optional end caps are available
- Place tape light in bottom slot to illuminate step overhang or in top front grip slot for upward illumination (Trulux Bendable only for top front grip slot)
- Compatible with most Trulux Tape Light

Available Lengths

39-3/8" (1 meter)

Available Finishes



Anodized Aluminum

Compatible Tape Light

- Trulux Single Color
- Trulux Tunable CCT (excludes Double Row)
- Trulux RGB
- Trulux Bendable

TRULUX™ Step Extrusion

Double-anodized and heavy gauge, the Step combines safety on multiple levels. Not only does it provide stair lighting, it also features two channels with rubber strips for anti-slip treads.


Best suited applications:

Step lighting, safety lighting, theater stairs, high traffic areas

Ordering Information

PE-STEP-1M*	Step Aluminum Extrusion
PE-UVLENS-1M	Frosted Polycarbonate UV Lens
PE-STEP-GRIP*	Grip Strip
PE-STEP-RIGHT*	Step End Cap (right)
PE-STEP-LEFT*	Step End Cap (left)
PE-STEP-TOOL*	Grip Strip Installation Tool

*Step extrusion is available as special order only.
Please allow up to 2 weeks for order processing.

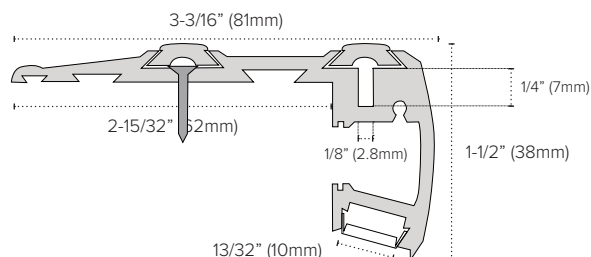



TRULUX EXTRUSIONS

STEP

TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES