

3" AL3-ICAT



Airtight IC rated economy recessed housing made exclusively for American Lighting's X34 Interchangeable Series when used with 3" trim packages. Featuring adjustable nail bar hangers with built-in T bar clips and parallel junction box for easy installation.

Performance


- Made exclusively for American Lighting X34 interchangeable series with 3" (X3) trim kits
- IC rated for direct contact with insulation
- Parallel junction box for easy installation
- 35 watt maximum for non-LED trim kits
- c/ETL/us listed

Construction

- Airtight aluminum housing
- Nail bar hangers with built-in T bar clips
- 24" adjustable span with parallel junction box
- 5.45" overall height

Installation

- New construction with easy nail-in bar hangers
- Remodel housing for tile ceiling installations
- "Direct-snap" to mating X34 light modules

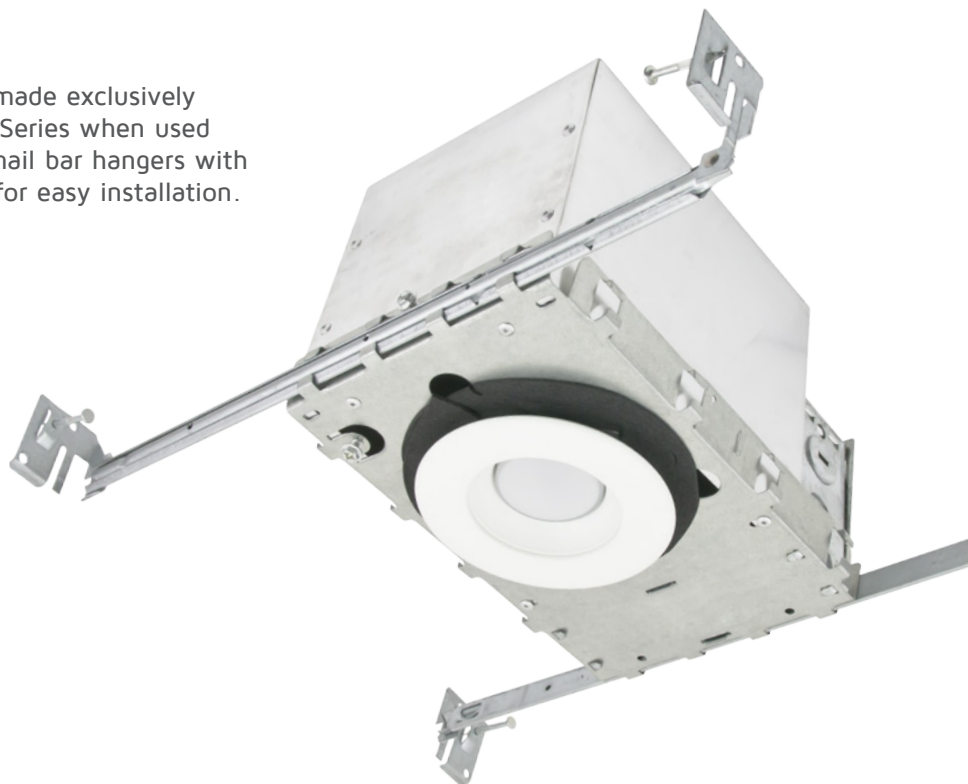


Direct snap power connector

Specifications

Series	AL3-ICAT
Input voltage	120V AC, 60Hz
Wattage	35W max (non-LED)
Housing	Airtight aluminum
Rating	c/ETL/us Listed, Type IC
Dimensions	3" Dia. (inner) x 5.45"H
Mounting	New construction / remodel*

*When installed in tile ceilings

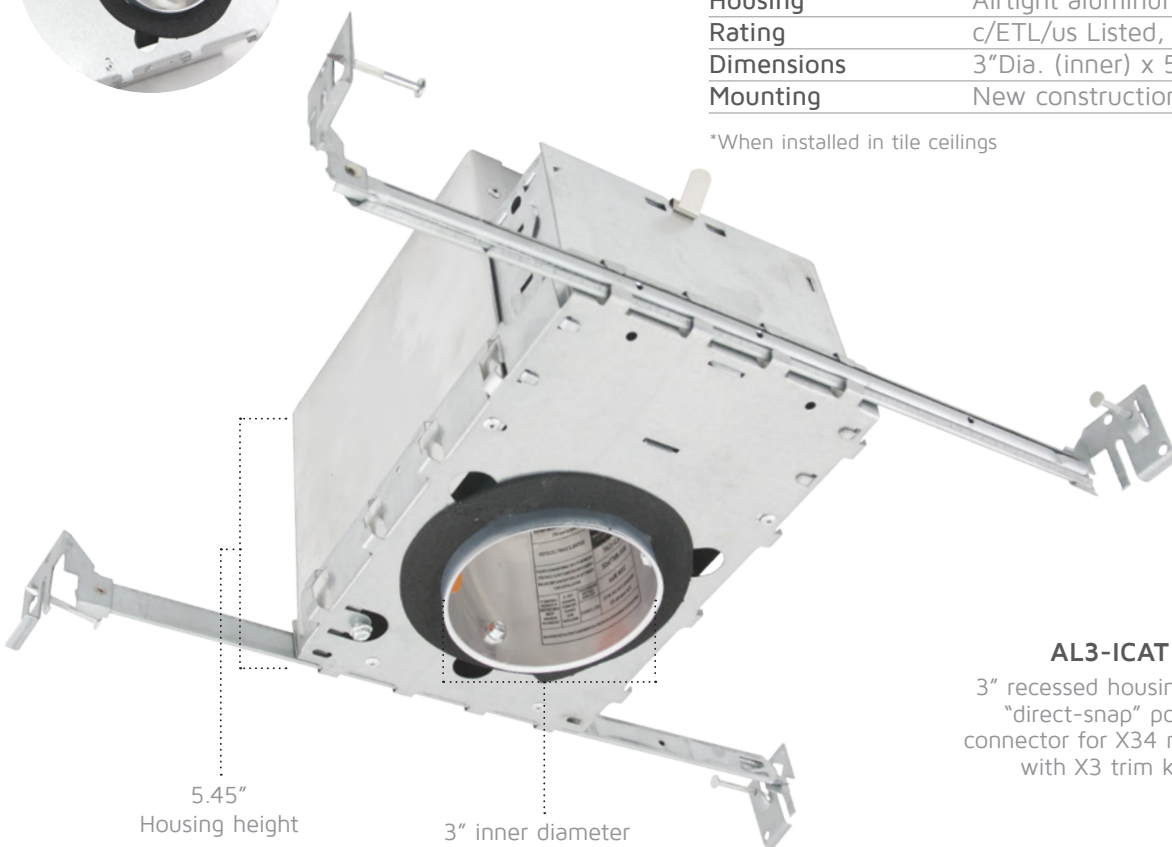

5.45"
Housing height

3" inner diameter
3.25" outer diameter

AL3-ICAT
3" recessed housing with "direct-snap" power connector for X34 modules with X3 trim kits